

Analytic instrument for SF₆ gas and alternative insulating gases

Model GA11

WIKA data sheet SP 62.12

Applications

- Analysis of the gas quality in gas-filled equipment
- For the analysis of SF₆ gas and alternative gas mixtures (C4-FN gas mixtures, natural origin gases)

Special features

- Provides measured values for humidity, gas composition (purity) and decomposition products
- Intelligent measurement based on the stability criteria of the sensing technology
- Temperature compensated sensing technology
- Not subject to any transport restrictions (IATA)



Analytic instrument, model GA11 (V2025)

Description

The model GA11 analytic instruments are innovative and reliable instruments for determining the quality of different insulating gases. Among these insulating gases are included SF₆, C4-FN gas mixtures and also applications for natural origin gases (gas mixtures based on nitrogen, oxygen and carbon dioxide). The model GA11 can measure the concentration of up to six substances, depending on the selected equipment variant.

Design

A clearly arranged menu structure and a 10" colour touchscreen allow for intuitive operation. Sensors for the measurement of purity and humidity are included as standard. The model GA11 can be equipped with additional sensors for determining gas decomposition products.

The measuring gas is temporarily stored in an integrated depot and can be pumped back directly into the gas compartment. It is also possible to use an external gas recovery bag. The closed concept does not generate any emissions to the atmosphere.

In the automatic mode, the measurement is terminated, intelligently, based on stability criteria (variable measurement duration).

All functionalities are possible in both rechargeable battery and mains operation.

Field use

The analytic instrument is protected from the harsh ambient conditions through an impact-resistant and waterproof plastic case. The hard-top case, which is designed for field use, is fitted with wheels and a telescopic carrying handle for ease of transport.


User interface

The analytic instrument is operated via the user interface on the touchscreen display.

The fields and symbols with a grey background are action fields that open settings or information masks.

The menu navigation on the right-hand side of the screen can be used to open the specified operating and settings masks.

On completing measurement or service procedures as well as for warning messages, an audible signal is output.

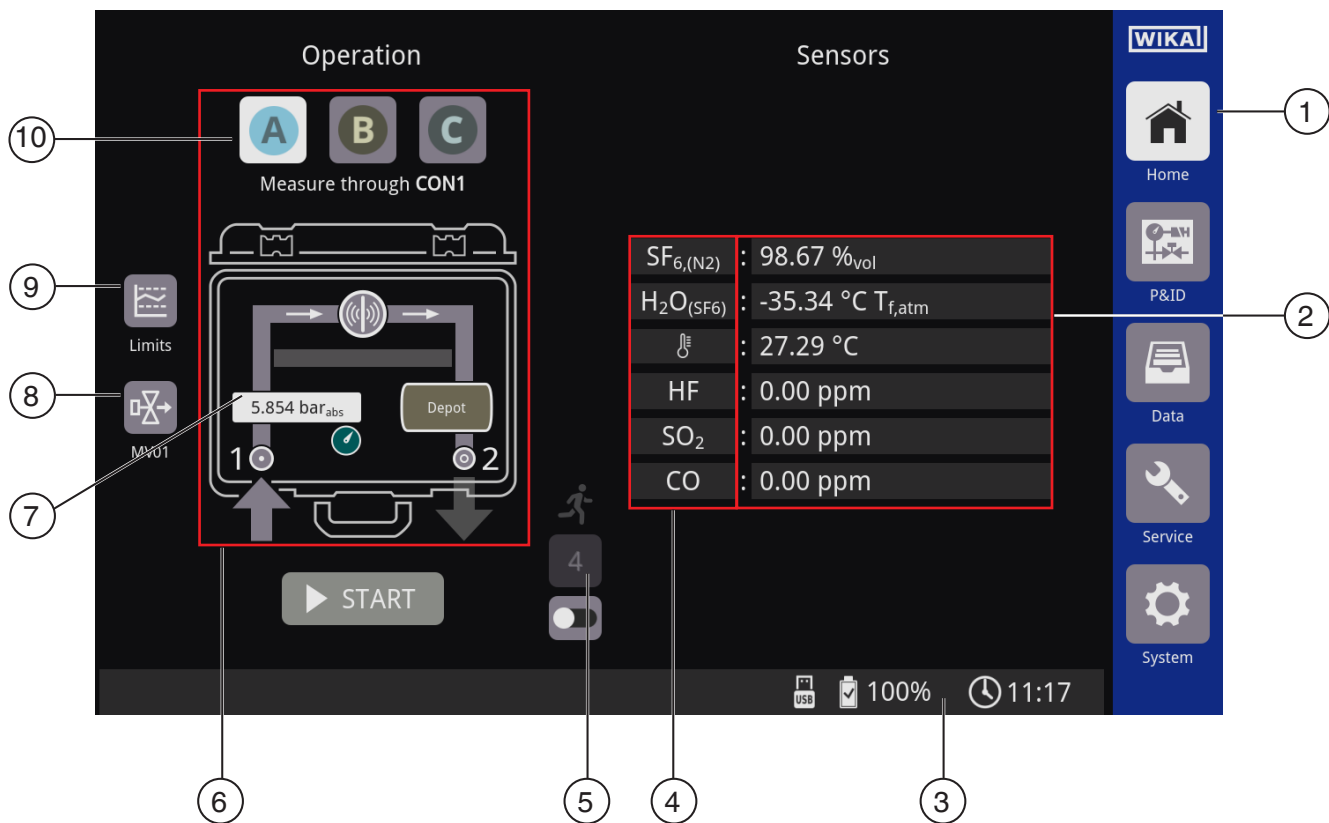

- ① Menu navigation
- ② Sensor values
- ③ Information bar
- ④ Sensing technology
- ⑤ Number of operations
- ⑥ Action area for displaying and for changing the measurement procedure
- ⑦ Input pressure
- ⑧ Open/close inlet valve
- ⑨ Set limit values
- ⑩ A - Measure through CON1
B - Pump back to CON1
C - Measure and pump back to CON1

Instrument construction



- ① Storage for measuring hose and power cord
- ② Operating area
- ③ Adapter



- ① Touchscreen
- ② Service port
- ③ USB interface
- ④ CON2 outlet for gas recovery bag
- ⑤ On/Off key
- ⑥ CON1 inlet, pump back
- ⑦ Grounding connection
- ⑧ USB data carrier
- ⑨ Mains connection

Specifications, version for SF₆ gas

Basic information	
Connections	
Inlet / Pump back	Quick coupling with self-sealing valve
Outlet for gas recovery bag	Quick coupling with self-sealing valve
Permissible pressure ranges	
Inlet / Pump back	1.03 ... 40 bar abs. ¹⁾ [0.24... 565.5 psi] / max. 10 bar abs. [130.5 psi]
Outlet for gas recovery bag	< 1.015 bar abs.
Display	10"-TFT-Touchscreen
Flow rate of measuring gas	18 litres/hour
Dimensions	58 x 47 x 30 cm [22.8 x 18.5 x 11.8 in]
Weight ²⁾	Approx. 22 kg [49 lb]
Ingress protection (IP code) per IEC 60529	
Case closed	IP65
Case open	IP20

1) In use with pressure reducer (article number: 14722090). Without pressure reducer max. 16 bar abs. [232.06 psi abs.].

2) Without adapter

Voltage supply and power consumption	
Voltage supply	
Battery operation	NiMH (nickel-metal hydride), rechargeable battery is charged during mains operation
Mains operation	AC 110 ... 240 V (50/60 Hz)
Power consumption	Max. 161 W

Operating conditions	
Operating temperature	-10 ... +50 °C [14 ... 122 °F]
Storage temperature range	-15 ... +55 °C [5 ... 131 °F]
Humidity	10 ... 90 % relative humidity (non-condensing)

Humidity sensor	
Measurement principle	Polymer-based capacitive humidity sensor
Measuring range / Accuracy	-60 ... +40 °C [-76 ... +104 °F] ±2 K (T _{gas} - T _d < 60 K) ±3 K (T _{gas} - T _d < 80 K) → See „Dew point accuracy“, page 6
Resolution	0,01 °C
Units	°C T _{d,atm} / °C T _{f/d,atm} / °C T _{d,press} / °C T _{f/d,press} / ppm _w / ppm _v / % rH

SF ₆ percentage sensor	
Measurement principle	Speed of sound
Measuring range / Accuracy ¹⁾	80 ... 100 % vol ±0.2 % based on SF ₆ /N ₂ mixtures 50 ... 80 % vol ±0,3 %, based on SF ₆ /N ₂ mixtures 15 ... 25 % vol ±0,5 %, based on SF ₆ /N ₂ mixtures 0 ... 100 % vol ±0.5 % based on SF ₆ /CF ₄ mixtures
Resolution	0.01 %

1) Outside the specified measuring ranges, the accuracy is ±1 %. Optimisation of individual measuring ranges on request.

Optional sensing technology

SO ₂ sensor	
Measurement principle	Electrochemical sulphur dioxide sensor
Measuring range / Accuracy	In combination with HF sensor, only 20 ppm makes sense. <ul style="list-style-type: none"> ■ 0 ... 20 ppm ±0.4 ppm ■ 0 ... 100 ppm ±2 ppm ■ 0 ... 500 ppm ±10 ppm
Resolution	0.01 ppm
Max. zero point offset	0.5 %
Long-term stability	< 2 % signal degradation / month (linear)
Service life	2 years starting from installation

HF sensor	
Measurement principle	Electrochemical hydrogen fluoride sensor
Measuring range / Accuracy	0 ... 10 ppm ±0.2 ppm
Resolution	0.01 ppm, of end value of measuring range
Max. zero point offset	0.5 %
Long-term stability	< 2 % signal degradation / month (linear)
Service life	2 years starting from installation


H ₂ S sensor	
Measurement principle	Electrochemical hydrogen sulphide sensor
Measuring range / Accuracy	0 ... 100 ppm ±2 ppm
Resolution	0.01 ppm, of end value of measuring range
Max. zero point offset	0.5 %
Long-term stability	< 2 % signal degradation / month (linear)
Service life	2 years starting from installation

CO sensor	
Measurement principle	Electrochemical carbon monoxide sensor
Measuring range / Accuracy	0 ... 500 ppm ±10 ppm
Resolution	0.01 ppm
Max. zero point offset	0.5 %
Long-term stability	< 2 % signal degradation / month (linear)
Service life	2 years starting from installation

Dew point accuracy

Measuring deviation $< \pm 2$ K at $T_{\text{gas}} - T_{\text{d}} < 60$ K

Measuring deviation $< \pm 3$ K at $60 \text{ K} < T_{\text{gas}} - T_{\text{d}} < 80 \text{ K}$, $T_{\text{gas}} - T_{\text{d}} > 80 \text{ K}$ n. d.

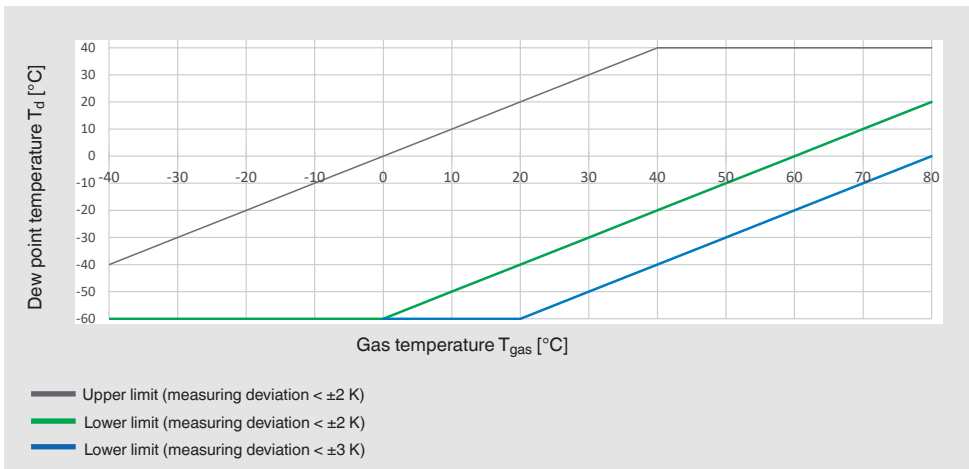


Examples:

- If the gas temperature is $+30$ °C and the dew point is -20 °C, an accuracy of $< \pm 2$ K is achieved ($T_{\text{gas}} - T_{\text{d}} < 60$ K).
- If the gas temperature is $+40$ °C and the dew point is -30 °C, an accuracy of $< \pm 3$ K is achieved ($60 \text{ K} < T_{\text{gas}} - T_{\text{d}} < 80 \text{ K}$).

Approvals

Logo	Description	Region
CE	EU declaration of conformity	European Union
	EMC Directive	
	EN 61326 emission (group 1, class B) and immunity (industrial environments)	
	Pressure Equipment Directive	
	Low Voltage Directive	
	Machinery Directive	
RoHS directive		

Accessories and spare parts

	Description	Order number
	<p>Gas recovery bag, model GA45</p> <ul style="list-style-type: none"> ■ Low weight and easily transportable ■ Cost-effective version to prevent SF₆ emissions ■ Compatible with all WIKA analytic instruments ■ With overpressure valve as burst protection ■ Resistant to decomposition products ■ Storage capacity 110 litres [29.06 gal] <p>For further specifications, see data sheet SP 62.08</p>	14531953
-	<p>Pressure reducer</p> <ul style="list-style-type: none"> ■ Single-stage 2-port line pressure regulator for corrosive gases and gas mixtures ■ Material: stainless steel ■ Inlet pressure: 40 bar ■ Outlet pressure: 10 bar, adjustable ■ Inlet: quick coupling D9 female ■ Outlet: quick coupling D9 male 	14722090

Ordering information

Model / Version / Sensing technology / Accessories

© 05/2025 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.
 The specifications given in this document represent the state of engineering at the time of publishing.
 We reserve the right to make modifications to the specifications and materials.
 In case of a different interpretation of the translated and the English data sheet, the English wording shall prevail.

